



**SECURUS PROPRIETARY MOBILE APP**




## **SECURUS SS-0404ASL-AHD-M1**

4 Channels 720P Standalone DVR with HDMI

A Professional 4 Channels H.264 Hardware Compression Standalone. Supports Mobile Viewing on iPhone and Android Mobiles via **REYES** Application. You can format HDD and control entire device using the mobile application. It has one of the easiest Playback and Backup modes. Hence, the Device is very User Friendly.

**SECURUS NVR RANGE**  
**01-05-2016**

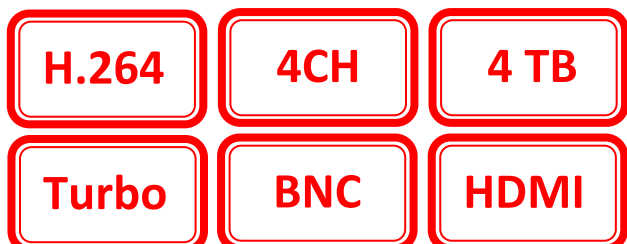

<b>Parameter</b>	<b>Details</b>
<b>Model</b>	SS-0404ASL-AHD-M1
<b>Make</b>	<b>SECURUS</b>
<b>User Interface</b>	Graphic User Interface (OSD)
<b>Operating System</b>	Embedded Linux
<b>Operation Mode</b>	Preview, Record, Playback, Backup, Network
<b>Password Security</b>	Multi-level User Management
<b>Audio Input</b>	1 in, RCA
<b>Video Input</b>	4 in, BNC
<b>HDMI Output</b>	Supports
<b>VGA output</b>	Supports
<b>CVBS main output</b>	1 out, BNC ; PAL:704*576, NTSC:704*480
<b>Audio output</b>	1 out, RCA
<b>Display</b>	1/4 optional
<b>Video standard</b>	PAL/NTSC
<b>Video compression</b>	H.264
<b>Display frame rate</b>	PAL: 100 FPS (4 x 25 fps) NTSC: 120 FPS (4 x 30 fps)
<b>Recording frame rate</b>	PAL: 100 FPS (4 x 25 fps) NTSC: 120 FPS (4 x 30 fps)
<b>Video encoding resolution</b>	PAL: 4*720P, 960H, WHDI, D1, HDI, NTSC: 4*720P, 960H, WHDI, D1, HDI,
<b>Video frame rate</b>	PAL: 1-25FPS NTSC:1-30FPS

<b>Parameter</b>	<b>Details</b>
<b>Video bit rate</b>	QCIF:192-384kbps, CIF:384-768kbps, HD1:512-1280Kbps, D1:768-1536kbps
<b>Stream Type</b>	Video & Audio/Video
<b>Audio compression</b>	ADPCM
<b>Recording mode</b>	Always/Schedule/Alarm recording/Motion detection recording
<b>Video search</b>	Time/Channel/Event
<b>Audio bit rate</b>	8—32kbps
<b>Dual-stream</b>	Supports
<b>Mobile Monitoring</b>	"REyes" Application for Android / iPhone iPad / Blackberry
<b>Recording resolution</b>	4 CH 720P Recording + 4 CH realtime Playback
<b>Recording Parameters</b>	MAX: 4 x 720P @ 25FPS
<b>Recording Playback</b>	1- 4 Channel optional
<b>HDD Port</b>	1 pieces SATA
<b>HDD Maximum Capacity</b>	4TB for each Sata connector
<b>Voice talk</b>	N.A.
<b>Record mode</b>	Audio & Video recording simultaneously
<b>DDNS Server</b>	www.securusddns.com
<b>Serial Port</b>	1 RS-485 Serial port
<b>Network</b>	1 RJ45 10M/100M
<b>E-Sata Connector</b>	N.A.

<b>Parameter</b>	<b>Details</b>
<b>USB Connector</b>	2 USB 2.0
<b>Firmware update</b>	Support USB update/Network update
<b>Alarm input</b>	N.A.
<b>Alarm output</b>	N.A.
<b>Power supply</b>	DC 12V 2A
<b>Operation Temperature</b>	-10°C--55°C
<b>Operation Humidity</b>	10%--90%
<b>Chassis</b>	Standard 1.0U
<b>Dimension</b>	230mm (W)×315mm (D)×40mm (H)
<b>Weight(without HDD)</b>	≤1.5Kg

### REyes Mobile Application



**Android**



**iPhone**