



SECURUS PROPRIETARY MOBILE APP




SECURUS SS-1602ASL-AHD-M1

16 Channels 720P Standalone DVR with HDMI

A Professional 16 Channels H.264 Hardware Compression Standalone. Supports Mobile Viewing on iPhone and Android Mobiles via **REyes** Application. You can format HDD and control entire device using the mobile application. It has one of the easiest Playback and Backup modes. Hence, the Device is very User Friendly.

SECURUS NVR RANGE
01-05-2016

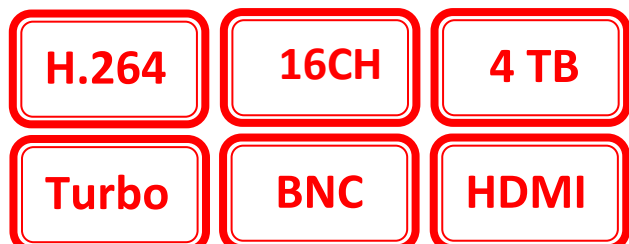

Parameter	Details
Model	SS-1602ASL-AHD-M1
Make	SECURUS
User Interface	Graphic User Interface (OSD)
Operating System	Embedded Linux
Operation Mode	Preview, Record, Playback, Backup, Network
Password Security	Multi-level User Management
Audio Input	2 in, RCA
Video Input	16 in, BNC
HDMI Output	Supports
VGA output	Supports
CVBS main output	1 out, BNC ; PAL:704*576, NTSC:704*480
Audio output	1 out, RCA
Display	1/4/6/8/9/16 optional
Video standard	PAL/NTSC
Video compression	H.264
Display frame rate	PAL: 400 FPS (16 x 25 fps) NTSC: 480 FPS (16 x 30 fps)
Recording frame rate	PAL: 400 FPS (16 x 25 fps) NTSC: 480 FPS (16 x 30 fps)
Video encoding resolution	PAL: 16*720P, 960H, WHDI, D1, HDI, NTSC: 16*720P, 960H, WHDI, D1, HDI,
Video frame rate	PAL: 1-25FPS NTSC:1-30FPS

Parameter	Details
Video bit rate	QCIF:192-384kbps, CIF:384-768kbps, HD1:512-1280Kbps, D1:768-1536kbps
Stream Type	Video & Audio/Video
Audio compression	ADPCM
Recording mode	Always/Schedule/Alarm recording/Motion detection recording
Video search	Time/Channel/Event
Audio bit rate	8—32kbps
Dual-stream	Supports
Mobile Monitoring	"REyes" Application for Android / iPhone iPad
Recording resolution	4 CH 720P Recording + 4 CH realtime Playback
Recording Parameters	MAX: 4 x 720P @ 25FPC
Recording Playback	1- 4 Channel optional
HDD Port	1 pieces SATA
HDD Maximum Capacity	4TB for each Sata connector
Voice talk	N.A.
Record mode	Audio & Video recording simultaneously
DDNS Server	www.securusddns.com
Serial Port	1 RS-485 Serial port
Network	1 RJ45 10M/100M
E-Sata Connector	N.A.

Parameter	Details
USB Connector	2 USB 2.0
Firmware update	Support USB update/Network update
Alarm input	N.A.
Alarm output	N.A.
Power supply	DC 12V 2A
Operation Temperature	-10°C--55°C
Operation Humidity	10%--90%
Chassis	Standard 1.0U
Dimension	230mm (W)×315mm (D)×40mm (H)
Weight(without HDD)	≤1.5Kg

REyes Mobile Application



Android



iPhone