



AHD



ANALOGUE HIGH DEFINITION
RESOLUTION: 2.0 MEGAPIXELS

SECURUS SS-HI10X-AHD-M2

2.0 Megapixel AHD PTZ Camera for Indoor Use.

SS-HI10X-AHD-M2 is 2.0 Megapixel Indoor PTZ Camera. AHD Cameras are part of the Latest Revolution in Surveillance Industry. AHD Cameras deliver 2.0 Megapixel resolution over Normal Co-Axial Cables. It supports a transmission distance of up to 500 Meters. SecurUS AHD Cameras deliver amazing image in both Day and Night Modes.

SECURUS 'AHD' SERIES CAMERA RANGE
01/01/2016

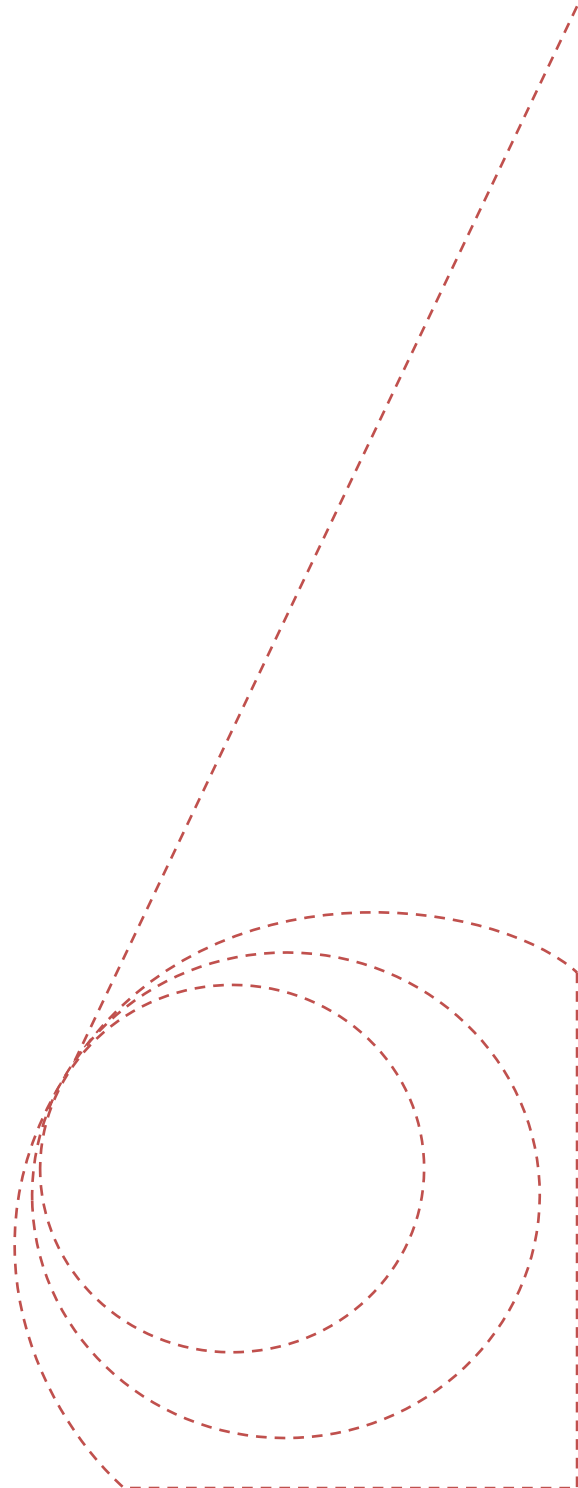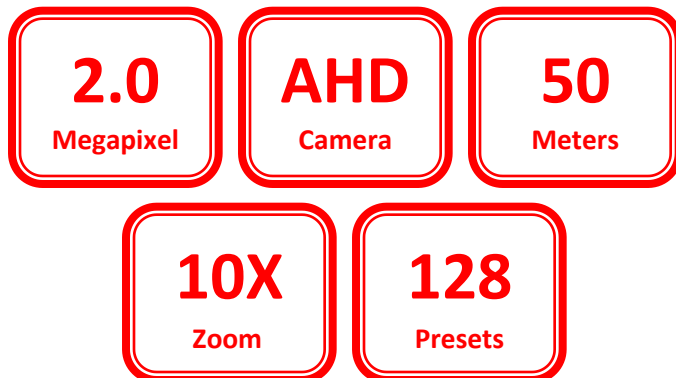

Parameter	Details
Model	SS-HI10X-AHD-M2
Make	SECURUS
Image Sensor	2.0 Megapixel CMOS Sensor
Lens	10x optical zoom Lens
Iris	Auto/Manual; F1.6 ~ F2.8
Shutter	Auto/Manual.
Shutter Time	1/6s ~ 1/8000s
Minimum Illumination	Color: 0.03 Lux B/W: 0.01 Lux (IR ON: 0.0 Lux)
S/N Ratio	≥ 50dB
Day/Night Mode	IR-Cut filter with auto switch (ICR)
IR Distance	50 Meters
Video Compression	H.264
Video Resolution	1920 x 1080 Pixels (Max)
Video Output	Supports 1 x BNC Video Output
Auto Control IR LED	PWM
OSD	Up to 8 OSDs
Digital Zoom	Supports
Pan Range	360° Endless
Pan Speed	0.02°/s ~ 120°/s
Tilt Range	-15° ~ +90° (Auto-Reverse)



Parameter	Details
Tilt Speed	0.1°/s ~ 160°/s
Presets	128 Presets
Dwell Time	1s ~ 60s Selectable
Guard Tours	3 Tours
Guard Points	Max: 16 Points
Communication Protocol	Pelco-D; Pelco-P
Baud Rate	2400BPS (Default)
Privacy Mask	Supports
Operating Temperature	Indoor: 0° ~ +40° Outdoor: -40° ~ +60°
Operating Humidity	≤90% RH (Non Condensing)
Park Time	1 ~ 60 Minutes
Communication	RS485
Power Supply	12V 3Amp
Power Consumption	~ 25W (Without IR)
Auto Flip	Pan: 180°; Tilt: 93°
360° Scan Speed	01-64speed setting available
Lightning Protection	Transient Voltage 6000V



Parameter	Details
Weight	0.980 KGs
A-B Scan	User Programmable
A-B Scan Speed	01-64speed setting available

© K.M. Electronic Cables Pvt. Ltd. - Ahmedabad. All Rights Reserved.
Specifications are subject to change without prior notice.