



AHD



ANALOGUE HIGH DEFINITION
RESOLUTION: 2.0 MEGAPIXELS

SECURUS SS-HI37X-AHD-M2

2.0 Megapixel AHD PTZ Camera for Indoor Use.

SS-HI37X-AHD-M2 is 2.0 Megapixel Indoor PTZ Camera. AHD Cameras are part of the Latest Revolution in Surveillance Industry. AHD Cameras deliver 2.0 Megapixel resolution over Normal Co-Axial Cables. It supports a transmission distance of up to 500 Meters. Securus AHD Cameras deliver amazing image in both Day and Night Modes.

SECURUS 'AHD' SERIES CAMERA RANGE
01/01/2016

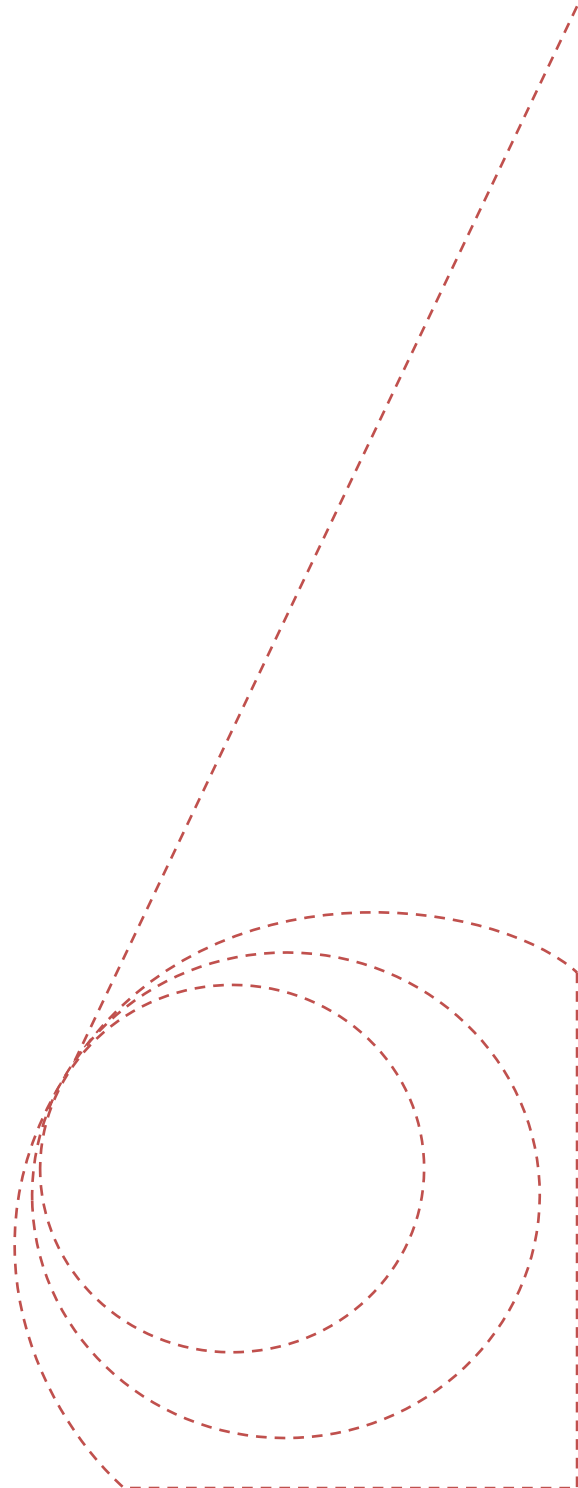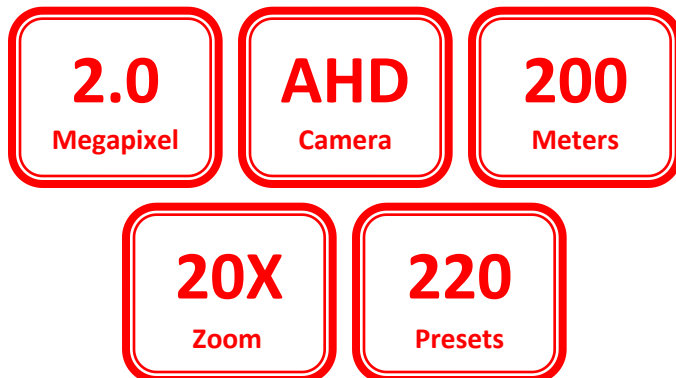

| Parameter | Details |
|-----------------------------|---------------------------------------------------|
| Model | SS-HI37X-AHD-M2 |
| Make | SECURUS |
| Image Sensor | 2.0 Megapixel CMOS Sensor |
| Lens | 37x optical zoom Lens |
| Iris | Auto/Manual; F1.6 ~ F2.8 |
| Shutter | Auto/Manual. |
| Shutter Time | 1/6s ~ 1/8000s |
| Minimum Illumination | Color: 0.03 Lux B/W: 0.01 Lux (IR ON: 0.0 Lux) |
| S/N Ratio | ≥ 50dB |
| Day/Night Mode | IR-Cut filter with auto switch (ICR) |
| IR Distance | 120 Meters |
| Video Compression | H.264 |
| Video Resolution | 1920 x 1080 Pixels (Max) |
| Video Output | Supports 1 x BNC Video Output |
| Auto Control IR LED | PWM |
| OSD | Up to 8 OSDs |
| Digital Zoom | Supports |
| Pan Range | 360° Endless |
| Pan Speed | 0.02°/s ~ 120°/s |
| Tilt Range | -15° ~ +90° (Auto-Reverse) |

| Parameter | Details |
|-------------------------------|----------------------------------------|
| Tilt Speed | 0.1°/s ~ 160°/s |
| Presets | 220 Presets |
| Dwell Time | 1s ~ 60s Selectable |
| Guard Tours | 3 Tours |
| Guard Points | Max: 16 Points |
| Communication Protocol | Pelco-D; Pelco-P |
| Baud Rate | 2400BPS (Default) |
| Privacy Mask | Supports |
| Operating Temperature | Indoor: 0° ~ +40° Outdoor: -40° ~ +60° |
| Operating Humidity | ≤90% RH (Non Condensing) |
| Park Time | 1 ~ 60 Minutes |
| Communication | RS485 |
| Power Supply | 12V 3Amp |
| Power Consumption | ~ 25W (Without IR) |
| Auto Flip | Pan: 180°; Tilt: 93° |
| 360° Scan Speed | 01-64speed setting available |
| Lightning Protection | Transient Voltage 6000V |



| Parameter | Details |
|-----------------------|------------------------------|
| Weight | 3.48 KGs |
| IP Rating | IP66 |
| A-B Scan | User Programmable |
| A-B Scan Speed | 01-64speed setting available |

© K.M. Electronic Cables Pvt. Ltd. - Ahmedabad. All Rights Reserved.
Specifications are subject to change without prior notice.