




## SECURUS SS-NE15DP-M4

4.0 Megapixel Indoor IP Dome Camera with POE

A Professional 4.0 Megapixel IP Camera Dome. It is **ONVIF** Compliant which means that it will work on all major NVR/HVR. Supports Mobile Viewing on iPhone and Android. It has built-in POE which makes the Installation easy. It is powered by Securusddns for remote viewing. The camera is provided with 2 way Audio and waterproof connector for professional Installation.


**SECURUS IPC RANGE**  
01-01-2015

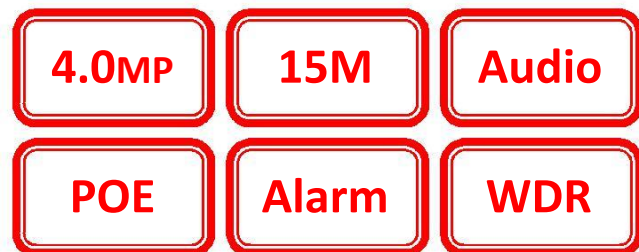

### SPECIAL FEATURE



Conventional

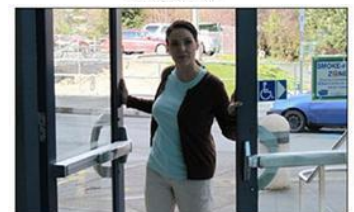

Wide Dynamic Range (WDR)



**WEATHERPROOF  
RJ45 CONNECTOR**

*\*Image only for representation*

| Parameter                       | Details  |
|---------------------------------|--|
| <b>Model</b>                    | SS-NE15DP-M4   |
| <b>Make</b>                     | <b>SECURUS</b>   |
| <b>Image Sensor</b>             | 4.0MP Progressive Scan CMOS  |
| <b>Image Pixels</b>             | 2592 x 1520 Pixels (4.0 MP)  |
| <b>Minimum Illumination</b>     | 0.01Lux @(F1.2,AGC ON),0Lux with IR  |
| <b>Day/Night</b>                | Auto (ICR) / Color / Black & White   |
| <b>WDR (Wide Dynamic Range)</b> | ≥80db  |
| <b>IR LEDs</b>                  | 24 IR LEDs   |
| <b>IR Distance</b>              | 15 ~ 20 Meters   |
| <b>Lens Mount</b>               | 3.6mm Megapixel Board Lens   |
| <b>Network Interface</b>        | 10/100 MBPS RJ45 Connector   |
| <b>Network Protocol</b>         | HTTP, TCP, ARP, RTSP, RTP, UDP, RTCP, SMTP, FTP, DHCP, DNS, DDNS, PPPoE, IPv4/v6, SNMP, QoS, UPnP, NTP |
| <b>Electronic Shutter Speed</b> | Manual/Auto (1/25 ~ 1/100000 S)  |
| <b>DDNS Service</b>             | FREE DDNS: <b><a href="http://www.securusddns.com">www.securusddns.com</a></b>                         |
| <b>ONVIF Protocol</b>           | Supports   |
| <b>Video Encoding</b>           | H.264  |
| <b>Video Bitrate</b>            | 128kbps ~ 8Mbps  |
| <b>Video Streams</b>            | Main Stream : 2592 x 1520; 30 FPS<br>Sub Stream 1: 720 x 576; 30 FPS                                   |

| <b>Parameter</b>                 | <b>Details</b>                      |
|----------------------------------|-------------------------------------|
| <b>Audio Input</b>               | Yes                                 |
| <b>Audio Output</b>              | Yes                                 |
| <b>Audio Compression</b>         | PCMV/PCMA                           |
| <b>Audio Bitrate</b>             | 64Kbps(G.711) / 16Kpbs(G.726)       |
| <b>Image Setup</b>               | Mirror Image/Reverse/Color Settings |
| <b>Alarm</b>                     | Motion Detection                    |
| <b>Alarm I/O</b>                 | N.A.                                |
| <b>Operation Temperature</b>     | -10°C ~ +55°C                       |
| <b>Operation Humidity</b>        | 0% ~ 90%                            |
| <b>Power Supply</b>              | DC12V / 2Amperes                    |
| <b>PoE (Power Over Ethernet)</b> | PoE (IEEE802.3af)                   |
| <b>Power Consumption</b>         | ≤3.5W (Without IR)                  |
| <b>Weight</b>                    | ≤0.35 KGs (No HDD)                  |

