



## SECURUS SS-NE20L2P-M2

2.0 Megapixel Outdoor IP Bullet Camera with PoE

A Professional 2.0 Megapixel IP Camera Bullet. It is **ONVIF** Compliant which means that it will work on all major NVR/HVR. It supports PoE Function. It comes with a weather-proof connector which is ideal for Outdoor Applications.

**SECURUS IPC RANGE**  
01-01-2015

2.0MP

20M


Audio

POE


Alarm

WDR

### SPECIAL FEATURE

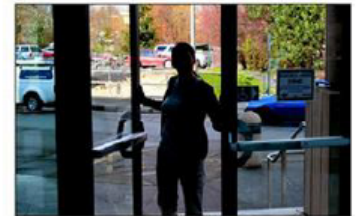

Conventional

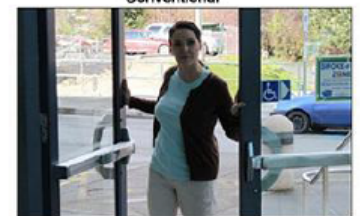

Wide Dynamic Range (WDR)



**WEATHERPROOF**  
**RJ45 CONNECTOR**

Parameter	Details
<b>Model</b>	SS-NE20L2P-M2
<b>Make</b>	<b>SECURUS</b>
<b>Image Sensor</b>	1/3" Progressive Scan CMOS
<b>Image Pixels</b>	1920 x 1080 Pixels (2.0 MP)
<b>Minimum Illumination</b>	0.01Lux @(F1.2,AGC ON),0Lux with IR
<b>Day/Night</b>	Auto (ICR) / Color / Black & White
<b>WDR (Wide Dynamic Range)</b>	≥80db
<b>IR LEDs</b>	1 Pcs III Generation LED Array
<b>IR Distance</b>	20 ~ 40 Meters
<b>Lens Mount</b>	3.6mm/6.0mm Megapixel Board Lens
<b>Network Interface</b>	10/100 MBPS RJ45 Connector
<b>Network Protocol</b>	HTTP, TCP, ARP, RTSP, RTP, UDP, RTCP, SMTP, FTP, DHCP, DNS, DDNS, PPPoE, IPv4/v6, SNMP, QoS, UPnP, NTP
<b>Electronic Shutter Speed</b>	Manual/Auto (1/25 ~ 1/100000 S)
<b>DDNS Service</b>	FREE DDNS: <b>www.securusddns.com</b>
<b>ONVIF Protocol</b>	Supports
<b>Video Encoding</b>	H.264
<b>Video Bitrate</b>	128kbps ~ 8Mbps
<b>Video Streams</b>	Main Stream : 1920 x 1080; 30 FPS Sub Stream 1: 720 x 576; 30 FPS

<b>Parameter</b>	<b>Details</b>
<b>Audio Input</b>	Yes
<b>Audio Output</b>	Yes
<b>Audio Compression</b>	PCMV/PCMA
<b>Audio Bitrate</b>	64Kbps(G.711) / 16Kpbs(G.726)
<b>Image Setup</b>	Mirror Image/Reverse/Color Settings
<b>Alarm</b>	Motion Detection
<b>Alarm I/O</b>	N.A.
<b>Operation Temperature</b>	-10°C ~ +55°C
<b>Operation Humidity</b>	0% ~ 90%
<b>Power Supply</b>	DC12V / 2Amperes
<b>PoE (Power Over Ethernet)</b>	PoE (IEEE802.3af)
<b>IP Rating</b>	IP66
<b>Power Consumption</b>	≤3.5W (Without IR)
<b>Weight</b>	≤1.0 KGs (No HDD)

