




SECURUS SS-NE50L5CP-VF-M2

2.0 MP Motorized Varifocal Outdoor IP Bullet Camera

A Professional 2.0 Megapixel IP Camera Bullet. It is **ONVIF** Compliant which means that it will work on all major NVR/HVR. It supports PoE Function. It comes with a weather-proof connector which is ideal for Outdoor Applications.

SECURUS IPC RANGE
01-04-2016

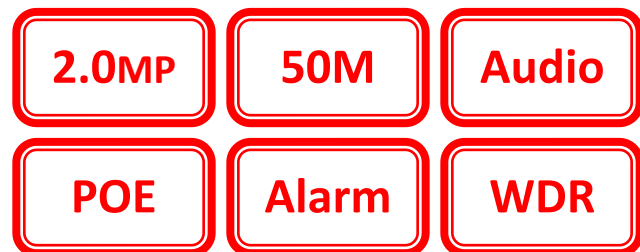

SPECIAL FEATURE



Conventional



Wide Dynamic Range (WDR)



**WEATHERPROOF
RJ45 CONNECTOR**

**Image only for representation*

Parameter	Details
Model	SS-NE50L5CP-VF-M2
Make	SECURUS
Image Sensor	1/3" Progressive Scan CMOS
Image Pixels	1920 x 1080 Pixels (2.0 MP)
Minimum Illumination	0.01Lux @(F1.2,AGC ON),0Lux with IR
Day/Night	Auto (ICR) / Color / Black & White
WDR (Wide Dynamic Range)	≥80db
IR LEDs	48Pcs φ5mm IR LEDs
IR Distance	50 ~ 60 Meters
Shutter Type	Manual/Auto
Shutter Speed	1/25s ~ 1/100000s
Lens Mount	2.8mm ~ 12.0mm Megapixel Lens
Lens Type	Motorized C-Mount Zoom Lens
Network Interface	10/100 MBPS RJ45 Connector
Network Protocol	HTTP, TCP, ARP, RTSP, RTP, UDP, RTCP, SMTP, FTP, DHCP, DNS, DDNS, PPPoE, IPv4/v6, SNMP, QoS, UPnP, NTP
Electronic Shutter Speed	Manual/Auto (1/25 ~ 1/100000 S)
DDNS Service	FREE DDNS: www.securusddns.com
ONVIF Protocol	Supports

Parameter	Details
Video Encoding	H.264
Video Bitrate	128kbps ~ 8Mbps
Video Streams	Main Stream : 1920 x 1080; 30 FPS Sub Stream 1: 720 x 576; 30 FPS
Audio Input	Yes
Audio Output	Yes
Audio Compression	PCMV/PCMA
Audio Bitrate	64Kbps(G.711) / 16Kpbs(G.726)
Image Setup	Mirror Image/Reverse/Color Settings
Alarm	Motion Detection
Operation Temperature	-10°C ~ +55°C
Operation Humidity	0% ~ 90%
Power Supply	DC12V / 2Amperes
PoE (Power Over Ethernet)	PoE (IEEE802.3af)
IP Rating	IP66
Power Consumption	≤3.5W (Without IR)
Weight	≤1.0 KGs (No HDD)