



# AHD



ANALOGUE HIGH DEFINITION  
RESOLUTION: 2.0 MEGAPIXELS

## SECURUS SS-HI12X-AHD-M2

2.0 Megapixel AHD PTZ Camera for Indoor Use.

SS-HI12X-AHD-M2 is 2.0 Megapixel Indoor PTZ Camera. AHD Cameras are part of the Latest Revolution in Surveillance Industry. AHD Cameras deliver 2.0 Megapixel resolution over Normal Co-Axial Cables. It supports a transmission distance of up to 500 Meters. SecurUS AHD Cameras deliver amazing image in both Day and Night Modes.

**SECURUS 'AHD' SERIES CAMERA RANGE**  
01/01/2016

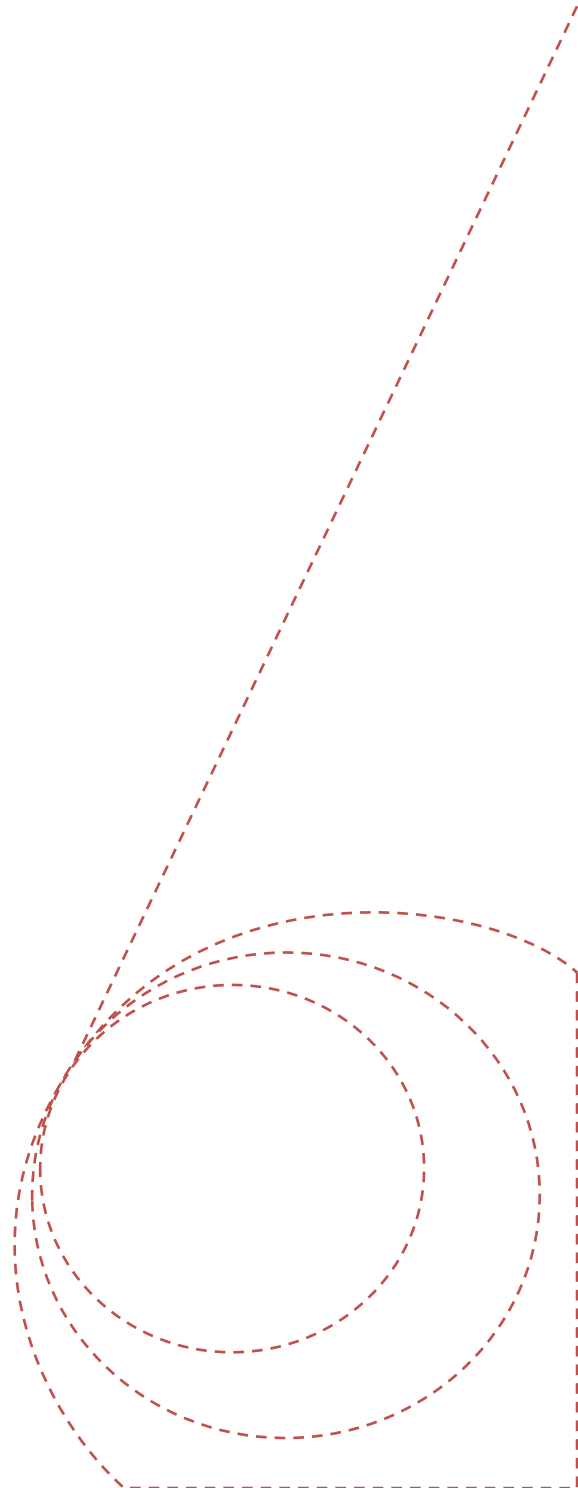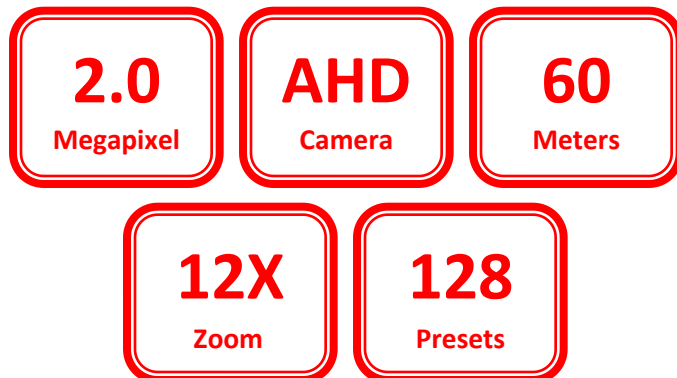

Parameter	Details
<b>Model</b>	SS-HI12X-AHD-M2
<b>Make</b>	<b>SECURUS</b>
<b>Image Sensor</b>	2.0 Megapixel CMOS Sensor
<b>Lens</b>	12x optical zoom Lens
<b>Iris</b>	Auto/Manual; F1.6 ~ F2.8
<b>Shutter</b>	Auto/Manual.
<b>Shutter Time</b>	1/6s ~ 1/8000s
<b>Minimum Illumination</b>	Color: 0.03 Lux B/W: 0.01 Lux (IR ON: 0.0 Lux)
<b>S/N Ratio</b>	≥ 50dB
<b>Day/Night Mode</b>	IR-Cut filter with auto switch (ICR)
<b>IR Distance</b>	60 Meters
<b>Video Compression</b>	H.264
<b>Video Resolution</b>	1920 x 1080 Pixels (Max)
<b>Video Output</b>	Supports 1 x BNC Video Output
<b>Auto Control IR LED</b>	PWM
<b>OSD</b>	Up to 8 OSDs
<b>Digital Zoom</b>	Supports
<b>Pan Range</b>	360° Endless
<b>Pan Speed</b>	0.02°/s ~ 120°/s
<b>Tilt Range</b>	-15° ~ +90° (Auto-Reverse)



<b>Parameter</b>	<b>Details</b>
<b>Tilt Speed</b>	0.1°/s ~ 160°/s
<b>Presets</b>	128 Presets
<b>Dwell Time</b>	1s ~ 60s Selectable
<b>Guard Tours</b>	3 Tours
<b>Guard Points</b>	Max: 16 Points
<b>Communication Protocol</b>	Pelco-D; Pelco-P
<b>Baud Rate</b>	2400BPS (Default)
<b>Privacy Mask</b>	Supports
<b>Operating Temperature</b>	Indoor: 0° ~ +40° Outdoor: -40° ~ +60°
<b>Operating Humidity</b>	≤90% RH (Non Condensing)
<b>Park Time</b>	1 ~ 60 Minutes
<b>Communication</b>	RS485
<b>Power Supply</b>	12V 3Amp
<b>Power Consumption</b>	~ 25W (Without IR)
<b>Auto Flip</b>	Pan: 180°; Tilt: 93°
<b>360° Scan Speed</b>	01-64speed setting available
<b>Lightning Protection</b>	Transient Voltage 6000V



<b>Parameter</b>	<b>Details</b>
<b>Weight</b>	1.45 KGs
<b>IP Rating</b>	IP66
<b>A-B Scan</b>	User Programmable
<b>A-B Scan Speed</b>	01-64speed setting available

© K.M. Electronic Cables Pvt. Ltd. - Ahmedabad. All Rights Reserved.  
Specifications are subject to change without prior notice.